




PLB PIPE DUCT FITTING

PLB PIPE DUCT PUSH FIT COUPLER

SPECIFICATIONS & STANDARDS





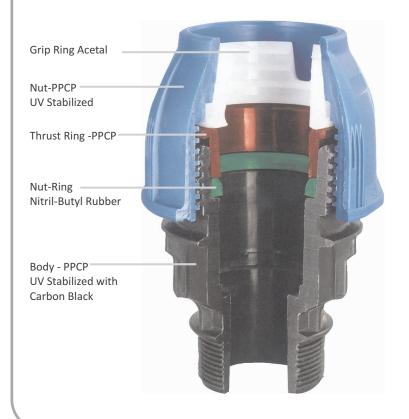

Diameter Pressure (DN) (PN) 32-50mm 16bar

Working Temperatures:

From - 20° C to + 60° C

Standards:

For Pipe : ISO :4427-2, EN:12201-2

ISO:4984, DIN:8074

Threads : IS:554, ISO:7/1, BS:21,

DIN: 2999

Test Standards : ISO:3601, 3503, 3459,

ISO:14236



PLB PIPE DUCT FITTING

PLB PIPE DUCT PUSH FIT COUPLER



The Push Fit Coupling is one of the easiest ways to connect any combination of Copper, PE-RT, PEX, CPVC or SRD9 HDPE pipes together, It is considered as one of the easiest plumbing fitting options available. Known by several names like HDPE Coupler, Duct Coupler and many others, the Push-fit

The primary material for Push-fit Duct Coupler is Polypropylene, which is a thermoplastic polymer. Since, the push fit Duct Couplers are made to solve the needs of various fittings in the form of several fittings, which is Polypropylene; these products are manufactured with high quality Polypropylene. It can be quite safely said that the Push-fit fittings are available in various materials, thus serving the different kinds of applications. In fact, almost all types of pipes have corresponding push-fit fittings specifically designed for them.

The manufacturing of the Push Fit Plumbing fittings is being done under various brand names. All the Push Fit Plumbing Couplers, which are manufactured, have the same internal structure. The similar internal structure allows the easy and perfect watertight sealing, when they are pushed into the pipes. Manufactured to serve the easy fittings, these can be used for all purposes, where the coupling is required between two pipes. Duct Coupler requires no soldering etc sorts of methods.

PLB PIPE DUCT END PLUG



The manufacturing of the Fiber Duct end plug is carried in such a way that both the purposes are being carried out in the easily and more efficient manner. The temporary duct plugs are designed in such a manner that the requirement of interim sealing of the ducts can be resolved and the needs can be protected from getting damaged. These also serve the purpose of the protection from the weather changes, damage from debris and from any animal inclusion.

PLB PIPE DUCT FITTING



(PLB PIPE DUCT CABLE SEALING PLUG)







PLB Duct Cable Sealing Plug or the Cable Sealing Plug is the plug for the purpose of sealing ducts during blowing-in. These devices act as a preventive mechanism for the ingress of water, sand and gas within various infrastructure environments. Manufactured with the robustness in mind, the Duct cable Sealing Plug offers the needed protection to the cables during the blowing in etc. With the high tensile strength being offered, the Cable Sealing Plug comes of various types and sizes.

PLB PIPE DUCT RUBBER END CAP



ARIHANT PLAST

Off. Add: Plot No. 2, Road No. 4, Behind Berger Paint Godown

22 Godown Industrial Area (Extn.), Jaipur - 302006 (Rajasthan) INDIA

Fact. Add : G-119, Road No. 3 (A), RIICO Industrial Area Bindayaka, Sirsi Road, Opp.

Bindayaka Railway Station, Near hanuman Mandir, Jaipur-302012 (Rajasthan)

INDIA

Website : www.arihantplast.in

Phone : +91-141-2240170

Mob. : +91 98290 10745

E-mail : arihantplastjaipur@gmail.com | akshatrashi@yahoo.com